

# ICW ATTACHING YOUR VESA PLATE


ICWUSA.com, Inc.

If you have any questions, please call 1-800-558-4435

## IF USING UL510

### ATTACH VESA


Mount the VESA plate to the friction mount using the 5/32" hex key and the 1/4-20 flat head screws in the hardware bag.

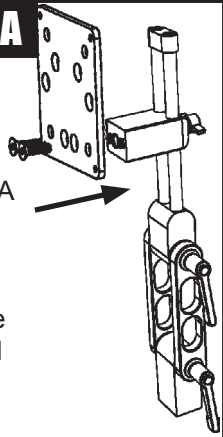

## IF USING UL500

### ATTACH VESA

Mount the VESA plate to the friction mount using the 5/32" hex key and the 1/4-20 flat head screws in the hardware bag.



## IF USING EV65

### ATTACH VESA TO EV65 JOINT

Insert stubs on VESA plate into holes in the Ergovision joint assembly. Insert 5/16 x 3/4 socket cap screws provided in both sides and tighten. Use the handle under mount to loosen tilt friction and adjust monitor tilt.

