




# KUV KIT KEYBOARD INSTALLATION

ICWUSA.com, Inc.


If you have any questions please call Toll Free 1-800-558-4435

## 1. REMOVE KEYBOARD

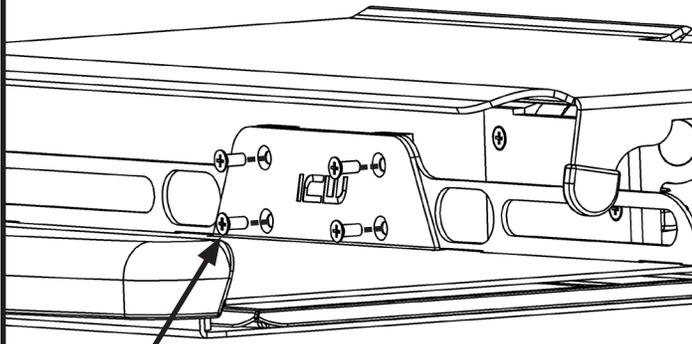


While holding onto keyboard assembly, remove four 8-32 screws with screwdriver and set the keyboard aside.

## 2. REMOVE KEYBOARD TRAY ASSEMBLY

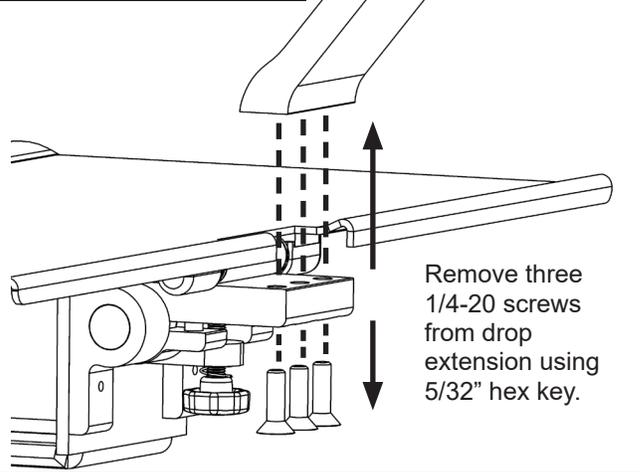


Remove three 1/4-20 screws from drop extension using 5/32" hex key.

## 3. INSTALL KUV KIT

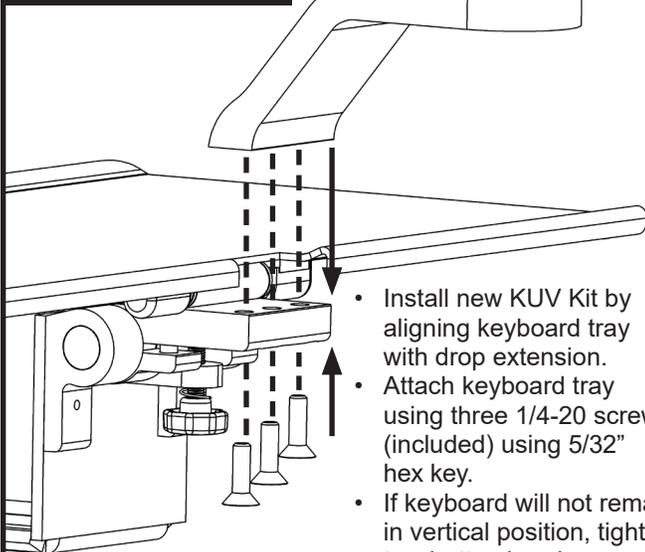


- Install new KUV Kit by aligning keyboard tray with drop extension.
- Attach keyboard tray using three 1/4-20 screws (included) using 5/32" hex key.
- If keyboard will not remain in vertical position, tighten two button head screws underneath flip-up connector.

## 4. INSTALL KEYBOARD

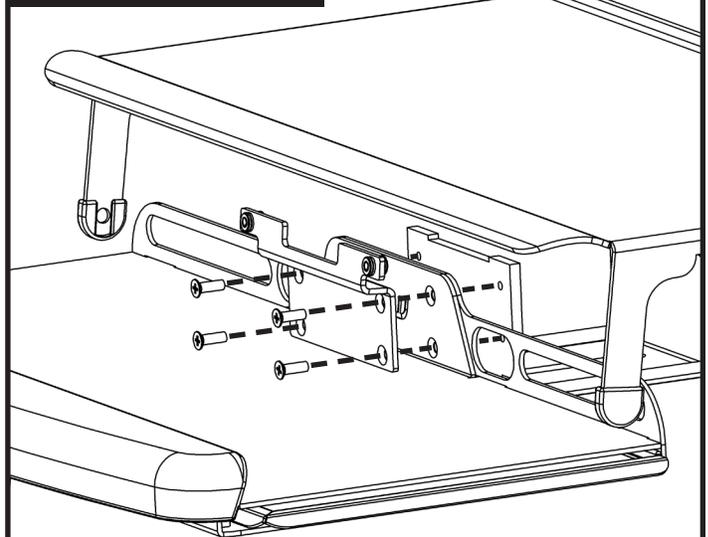

Reattach keyboard assembly and light bracket using a screwdriver with the new 8-32 screws (included).

## 5. ATTACH UV-CLEAN LIGHT

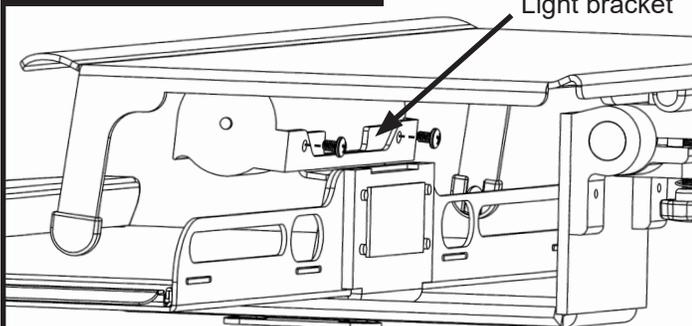

Light bracket

Attach UV-CLEAN Light onto the light bracket and secure in the back of the bracket with new 8-32 screws (included).

## CLEANING OF THE ICW MOUNTING DEVICE

When cleaning your ICW mounting unit please follow the points below. Proper cleaning of the mounting device will help assure proper function and extend the life of the unit.

1. Any general cleaner is acceptable except degreasers are not recommended near the bearing entrances.
2. Spray cleaner or water on a soft cloth or paper towel and then wipe down the mounts.
3. Do not spray directly at the bearing seams (located at all swivel points) as this could reduce the life of the bearings.

NOTICE: ICWUSA.COM, Inc. provides the appropriate hardware fasteners to match the majority if not all standard monitors and devices. It is the responsibility of the installer / integrator to ensure that the screws and fasteners have the adequate thread engagement. The rule of thumb is that the thread depth is greater than the diameter of the hole or 4 full turns of 360 degrees of thread engagement. It is also the responsibility of the installer / integrator to ensure that they do not damage the monitor or device by using a screw or fastener that is too long for hole and therefore damaging the unit by inserting too far.