


ICW QUICKLINK CEILING MOUNT


ICWUSA.com, Inc.

If you have any questions, please call 1-800-558-4435

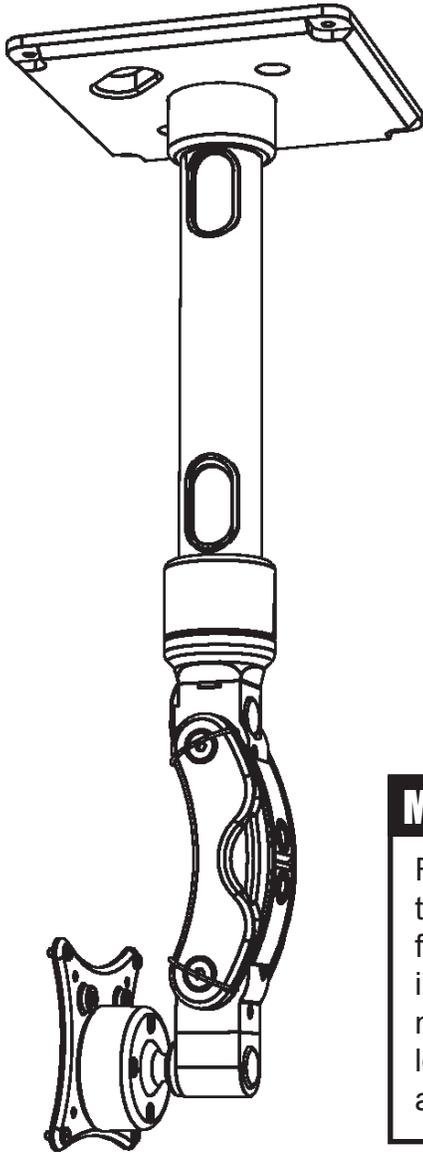


MOUNT INLINE CEILING PLATE

Firmly secure ceiling mount to solid ceiling joist using four #14 wood screws found in hardware bag, being sure mount is level. Be sure to loosen set screw before attaching pipe.

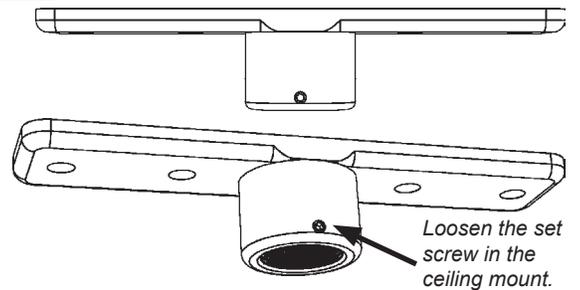


MOUNT SQUARE CEILING PLATE

Using four 1/4 x 2" lag bolt provided in hardware bag, secure ceiling mount to a solid wood surface or ceiling joist. Use square pattern or inline pattern, always being sure to use all 4 bolts. Run cords through center hole or the cord management port. Be sure to loosen set screw before attaching ceiling pipe.

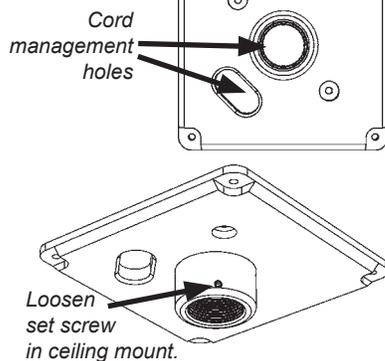

ATTACH PIPE TO CEILING PLATE

Thread pipe into ceiling mount and tighten set screw.

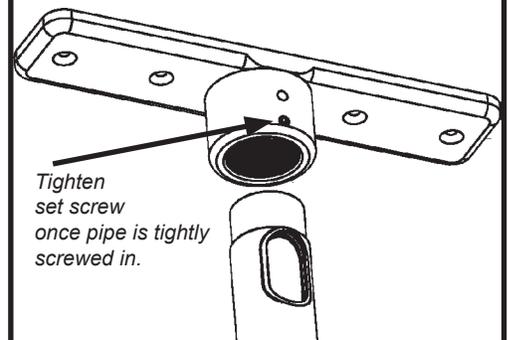


ICW QUICKLINK CEILING MOUNT

ICWUSA.com, Inc.

If you have any questions, please call 1-800-558-4435

ATTACH VESA TO MONITOR


Using a phillips screw driver, attach the VESA plate to the back of your LCD monitor.

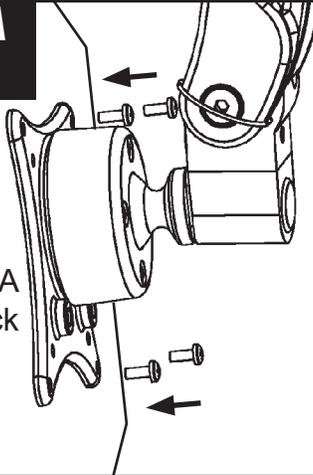


ADJUST QUICKLINK TILT

Adjust Monitor to desired position with ball VESA. Tilt your monitor 50° in any direction. Adjust your monitor between portrait and landscape by rotating ball VESA. Adjust monitor further by squeezing tilt buttons on back of Quicklink. Depressing either button will disengage the locking mechanism for the corresponding pivot providing 90 degrees of adjustment. Depressing both buttons at once allows the user to position both pivots simultaneously for a total of 180 degrees of adjustment.

Tilt Adjustment Buttons

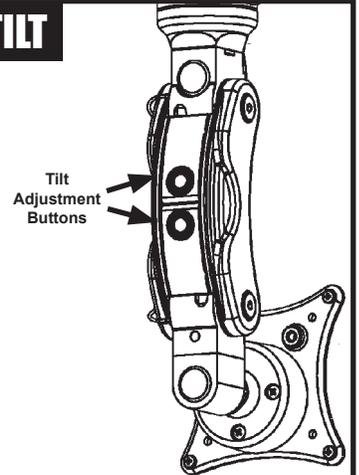

QUICKLINK WIRE MANAGEMENT

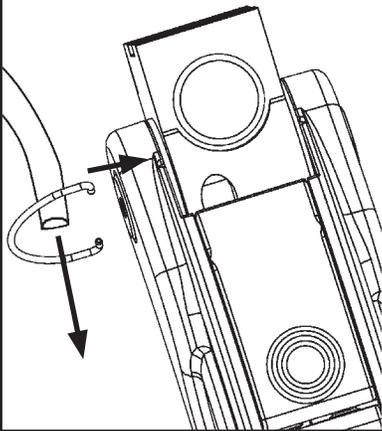

NOTE: The two clips provided can be installed on either side as needed.

- Place one end of the Cable Retainer into opening as shown.
- Route cables as needed.
- Hook other end of the clip into opening on opposite side as shown.
- Repeat for next clip.

