


# ICW UNDERCABINET PARALINK MONITOR INSTALL

ICWUSA.com, Inc.


If you have any questions, please call 1-800-558-4435

## UL550RA-TS28-D1


### MOUNT TRACK TO SURFACE

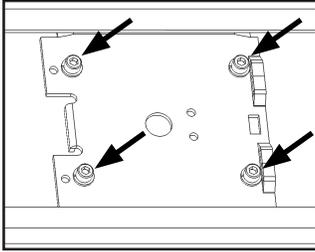

1. Remove the four socket head cap screws and lock washers located on the track.

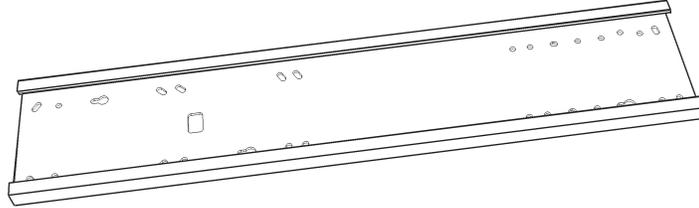

2. Install the TS28 Track Slider according to the INSTRUCTIONS PROVIDED IN YOUR HARDWARE BAG.

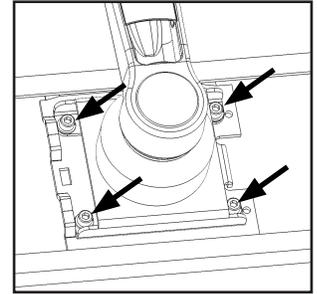


3. Using the four screws and lock washers removed in step 1, install the Slider Mount Assembly.

### ATTACH VESA TO MONITOR & RAILS

Attach VESA plate to monitor using the four 4mm screws in the hardware bag.


Screw slider knob through rails and into VESA assembly.

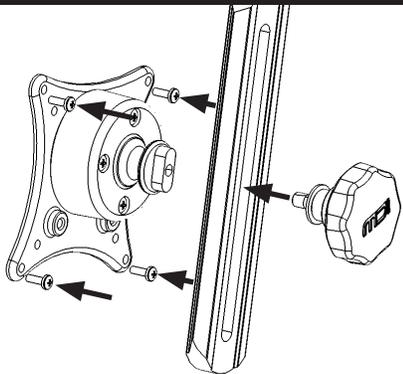

### ADJUST BALL VESA HEIGHT & TENSION

To adjust monitor height, loosen slider knob, move monitor to desired height and tighten knob.


Adjust pivot tension of the ball by gently and evenly tightening or loosening the four screws on the back of the ball VESA.

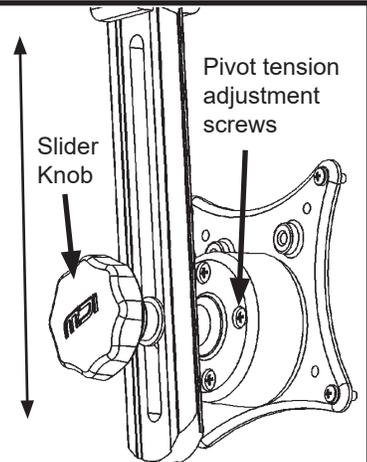

### ADJUST MONITOR ON INVERTED ARM

Tilt monitor 50° in any direction and rotate to portrait or landscape by rotating ball VESA.

To adjust arm height, loosen Paralink adjustment knob, raise or lower arm and tighten knob.

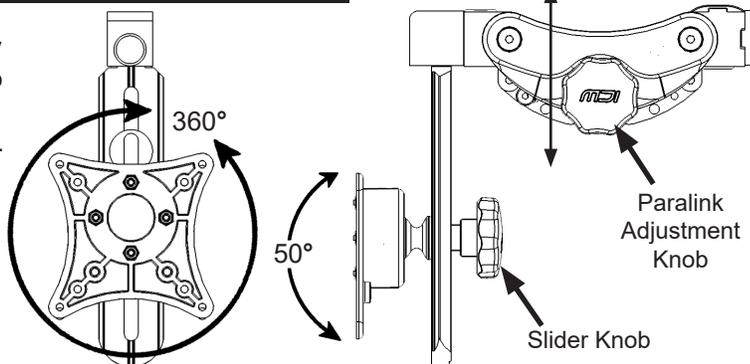

► **MAXIMUM LOAD CAPACITY: 28 LBS (12.7 KG)**

### CLEANING OF THE ICW MOUNTING DEVICE

When cleaning your ICW mounting unit please follow the points below. Proper cleaning of the mounting device will help assure proper function and extend the life of the unit.

1. Any general cleaner is acceptable except degreasers are not recommended near the bearing entrances.
2. Spray cleaner or water on a soft cloth or paper towel and then wipe down the mounts.
3. Do not spray directly at the bearing seams (located at all swivel points) as this could reduce the life of the bearings.

NOTICE: ICWUSA.COM, Inc. provides the appropriate hardware fasteners to match the majority if not all standard monitors and devices. It is the responsibility of the installer / integrator to ensure that the screws and fasteners have the adequate thread engagement. The rule of thumb is that the thread depth is greater than the diameter of the hole or 4 full turns of 360 degrees of thread engagement. It is also the responsibility of the installer / integrator to ensure that they do not damage the monitor or device by using a screw or fastener that is too long for hole and therefore damaging the unit by inserting too far.