


Overhead "Boom" Arm



Standard Overhead Arm: UL182i-OHAT/OHAP

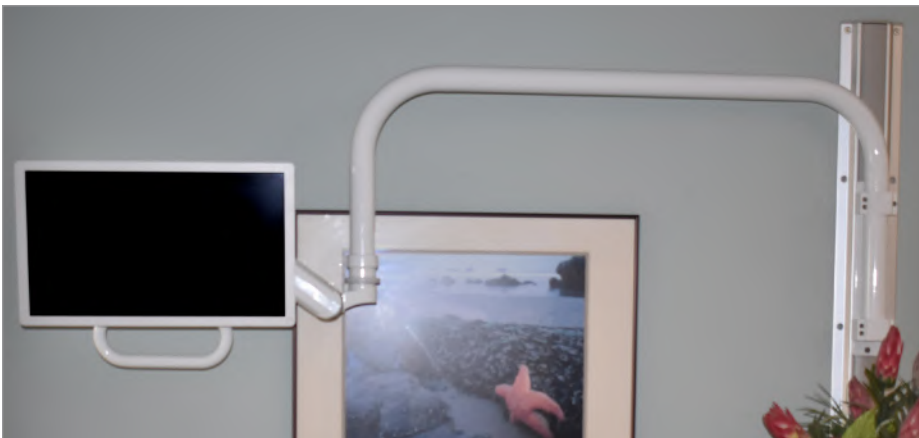

Overhead Short Arm: UL182i-OHATS/OHAPS



Exceptional reach for a monitor

ICW's unique overhead mounting arm is an excellent solution for healthcare and dental environments. It's also ideal for industrial applications including shipping and receiving, and factories that require long reach and extensive range of motion for a monitor.

- **ATTACHES** to the wall or above a cabinet, providing 180° of horizontal rotation at the mount.
- **CONVENIENTLY STOWS** just 8" (20 cm) from the wall and monitor can be pulled out when needed.
- **INTERNAL WIRE MANAGEMENT** for regular or low voltage.
- **POWDER COATED** for durability in your choice of 14 color options.

Specifications

	Standard Overhead Arm UL182i-OHAT/OHAP	Overhead Short Arm UL182i-OHATS/OHAPS
Load capacity	28 lbs (12.7 kg)	28 lbs (12.7 kg)
Maximum Horizontal Reach	77.5" (196.9 cm) with UL182	63" (160 cm) with UL182
	56.5" (143.5 cm)	42" (106.7 cm)
Vertical Adjustment Range	24" (60.7 cm)	24" (60.7 cm)
Horizontal swivel	180° at mount	180° at mount
Stowed depth	8" (20 cm)	8" (20 cm)
Mounting surface	Wall track or wall plate	Wall track or wall plate
Ultra 182 arm swivel	360°	360°
Monitor swivel	360°	360°
Monitor tilt	90°	90°
VESA interface	75mm and 100mm	75mm and 100mm
Finish	Powder coat	Powder coat

Monitor, keyboard and mouse not included.




For more information, contact your ICW representative or talk to one of our customer service representatives at 1-800-558-4435.


Range of Motion and Dimension Drawings

LENGTH COMPARISON

OVERHEAD SHORT ARM

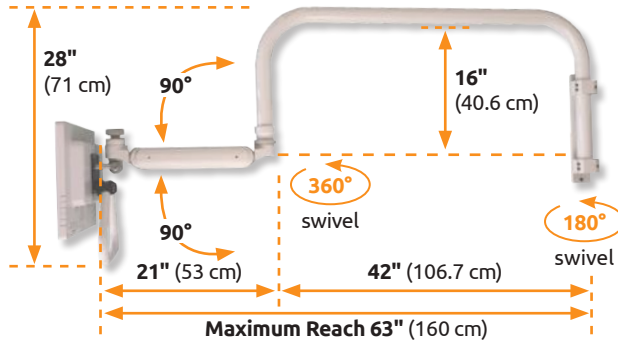


STANDARD OVERHEAD ARM

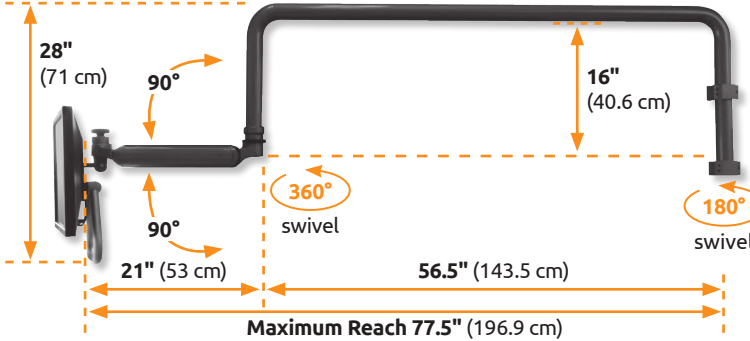

MOUNTING OPTIONS


WALL TRACK MOUNT

UL182i-OHAT and UL182i-OHATS

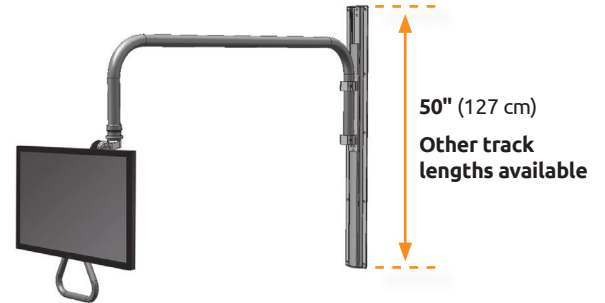

WALL PLATE MOUNT

UL182i-OHAP and UL182i-OHAPS

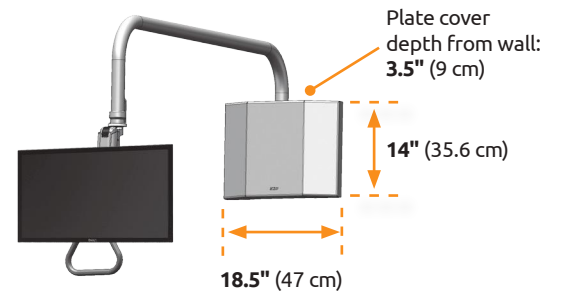

OVERHEAD ARM ADJUSTABILITY



ICWUSA.com, Inc.
1487 Kingsley Drive
Medford, OR 97504
800-558-4435

Available in these 5 standard colors and 9 custom colors.

