


# ICW ULTRA 95 CEILING MOUNT


ICWUSA.com, Inc.

If you have any questions, please call 1-800-558-4435

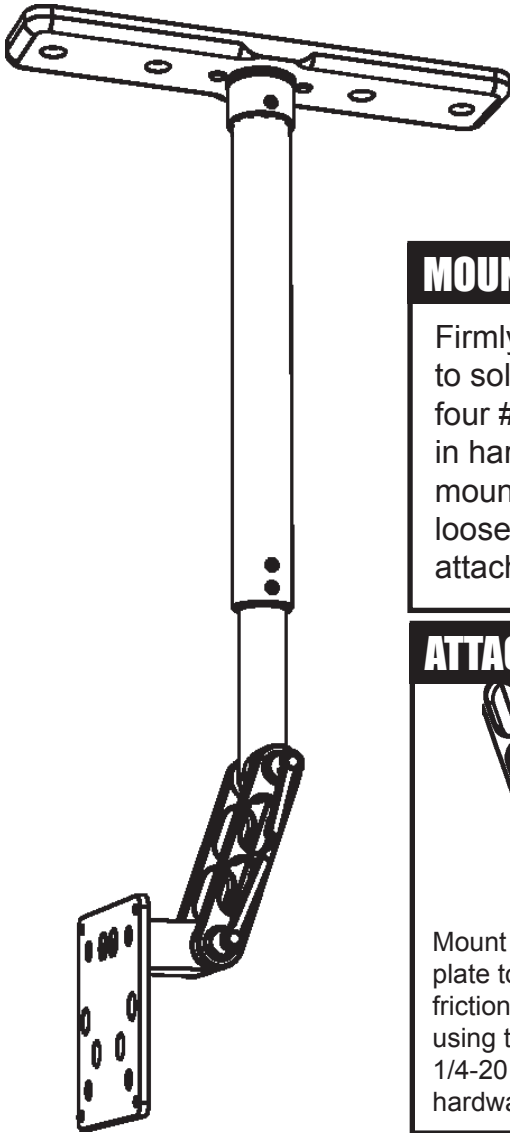


## MOUNT CEILING PLATE

Firmly secure ceiling mount to solid ceiling joist using four #14 wood screws found in hardware bag, being sure mount is level. Be sure to loosen set screw before attaching pipe.

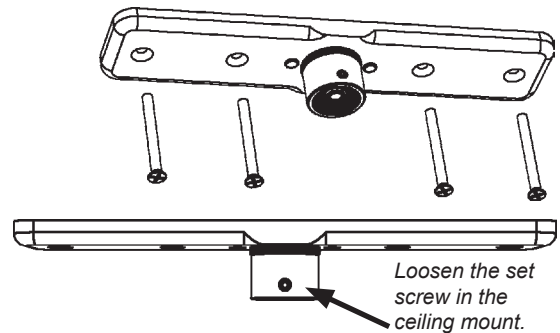


## ATTACH VESA

Mount the VESA plate to the friction mount using the 5/32" hex key and the 1/4-20 flat head screws in the hardware bag.

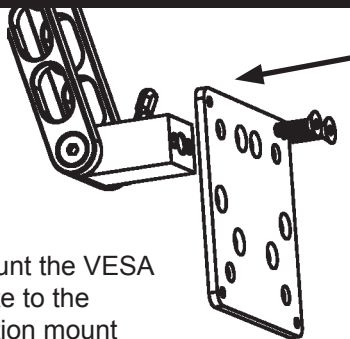


## ATTACH TO MONITOR

Attach your monitor to the VESA plate using the four 4mm screws in the hardware bag.

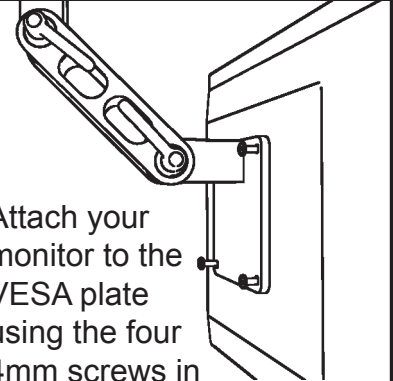


## ATTACH PIPE TO CEILING PLATE

Thread pipe into ceiling mount and tighten set screw.

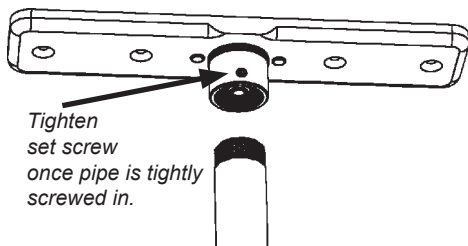

## ADJUST MONITOR HEIGHT

Adjust monitor height by loosening set screws, raising monitor to correct height then tightening set screws.

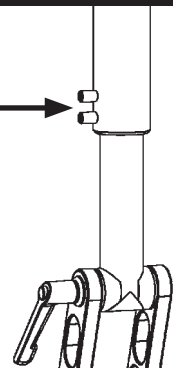

## ADJUST TILT HANDLES

Use the handles to adjust the tilt of the monitor.

